Hi-Copy

DMX- 8611e

User Guide

多媒体储存系统

使用手册

Revision 1.0

Tested To Comply
With FCC Standards
FOR HOME OR OFFICE USE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Federal Communications Commission (FCC) Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning:

To meet FCC requirements, a shielded power cord is required in order to prevent interference. It is essential that only the supplied power cord is to be used. Use only shielded cables to connect I/O devices to this equipment. You are cautioned that changes or modifications not approved by the party responsible for compliance could void your authority to operate the equipment.

前言

感谢你使用 DMX-8611e 复制光盘控制器. DMX-8611e 具有操作简单,方便,容易的特性, 透过 3 个面板上的 LED,可以快速达到复制光盘的效果.

本公司为多媒体储存系统之合法设计生产公司, 请勿使用本公司产品做违法盗拷之行为.

1. 产品特点

- ❖ 完全独立式光盘复制装置.
- ❖ 操作简单,方便,容易.
- ❖ IDE 接口.
- ❖ 快速拷贝烧录.
- ❖ 可利用 CD-ROM 升级韧体 (1 分钟即可完成升级).
- ❖ 自动侦测 CD 片格式.
- ❖ 可连续烧录,复制, 无需等候降温.

2 使用前注意事项

- ❖ 烧录前, 请先确认光盘来源片无重大损伤,刮伤或有污渍, 污染.
- ❖ CD-ROM 背后 jumper 设定为 Master device. CD-R 背后 jumper 设定为 Slave device.

3. 规格

湿度	20%-80%
工作环境温度	5°~35°
接口	IDE
安全规范	FCC,CE

4. 简易装配

打开上盖 ：

1. 松掉背板上缘螺丝.
2. 将上盖沿背板方向推动.
3. 取出上盖.

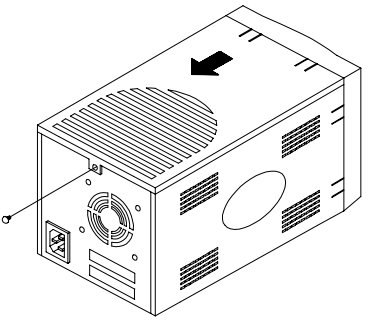

按下靠近面板内部卡笋，取下面板.



从附件中取出螺丝，刀轨，依照图标锁在 CD-ROM 光驱以及 CD-R（或 CD-R/W） 烧录机的两侧.

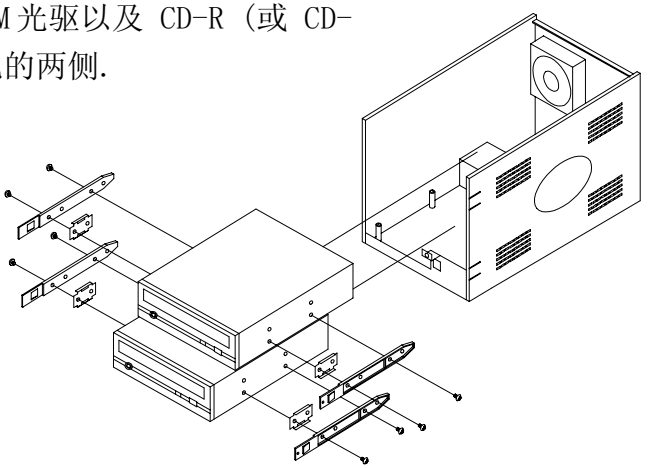

1. 将 DMX-8611e 控制板，依螺丝孔位锁在机壳底部.
2. 从附件中取出上一条排线 (40-pin)，一边分别连到 DMX-8611e 控制板上的插座，一边各自连到 CD-ROM 光驱以及 CD-R (或 CD-R/W) 烧录机. (注意排线有红色边的是第一脚).
3. 将电源供应器拉出来的三个电源接头，分别连到 DMX-8611e 控制器，光驱以及烧录机.
4. CD-ROM 背后 jumper 设定为 Master device. CD-R 背后 jumper 设定为 Slave device.

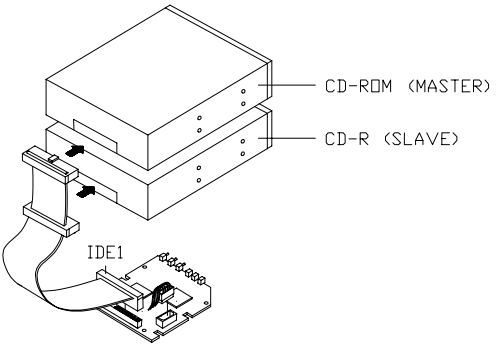

将光驱以及烧录机推入机箱，将面板固定，然后将上盖从背板方向往面板方向滑入，锁上背板上缘螺丝.

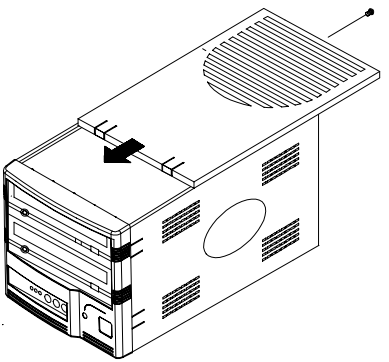

5. 面板操作方式

操作面板上有三个灯号和三个按键，其功能如下 ：

Mode ： 此按键为特殊模式. 需要按下此键与其它按键方有作用.

Mode + Run ： 升级控制器韧体.(即软件)

Mode + Speed ： 抹除 CD-RW 光盘片内容.

Speed ： 进入安全模式烧录，先进行速度仿真测试，测试速度由八倍速降至四倍速. 再降至二倍速. 若该倍速测试成功，则以该倍速进行烧录动作.

Run ： 此为开机默认值，内定用最高速进行烧录动作. 按下后直接进行烧录动作.

6. 升级控制器韧体

由于市面上 CD-ROM 光驱，以及 CD-R（或 CD-R/W） 烧录机，他们的机种与速度一直在增加. 为了提供更好的支持，使用者可以从网站下载新的软件，并将该软件使用 PC 烧录机烧录至光盘片上，将此光盘片放入 DMX-8611e 的 CD-ROM 光驱中，再同时按下 Mode 和 Run 键，即可进行韧体升级. 升级中切勿不当关闭电源，以免对机器造成损害.

7. 操作方式（快速复制）

5-1. 开机，热机时间约 4 ~ 5 秒，等待进入拷贝模式.

5-2. 按下 CD-ROM 和 CD-R（或 CD-R/W）面板上的 Eject 钮，打开光盘.

5-3. 先将母片放入 CD-ROM 光驱.

5-4. 再将空白片放入 CD-R （或 CD-R/W）烧录机.

5-5. 按下 CD-ROM 和 CD-R（或 CD-R/W）面板上的 Eject 钮，将片子推入光驱以及烧录机.

5-6.

一般光盘片对拷，只要母片状况良好，无刮伤或灰尘，可于执行到步骤 5-5 后，直接按下 Run 键，进行最高速对拷.

或者 ：

按 Speed 键后，进入安全模式烧录，先进行速度仿真测试，测试速度由八倍速降至四倍速. 再降至二倍速. 若该倍速测试成功，则以该倍速进行烧录动作.

8. 功能速查表

开机 ：

操作程序	错误说明
1. 绿灯，橙灯，红灯闪烁 5 秒	一声长哔声，红灯亮.
2. 一声短哔声，绿灯亮.	

拷贝模式 ：

操作程序	错误说明
1. 放入欲拷贝母片在 CD-ROM, 放入空片在 CD-R, 将片子推入 光驱以及烧录机后, 按 Run 键, 机器开始自动拷贝, 或按 Speed 键后, 进入安全模式烧录.	当烧录失败: 一声长哔声, 红灯亮.
2. 当烧录时, CD-ROM 以及 CD-R 面板上的 LED 闪烁.	
3. 如果烧录成功, 一声短哔声, 然后退出 CD-R 片.	

升级模式 ：

操作程序	错误说明
1. 在 CD-ROM 中, 放入升级 CD 片, 同时按 Mode 和 Run 键, 机器开始自动升级.	当升级失败: 一声长哔声, 红灯亮.
2. 升级成功后, 所有的灯会灭, 此时请关机重开.	

9. 技术支持服务

德泰科技网址 http://www.domex.com.tw

联络信箱: tec@domex.com.tw, shanghaidomex@sina.com

电话号码 ： 886-3-5772115 Ext. 275

86 -21-5385 7758 (上海)